HUNTA®

HUNTA HARDWARE
BULLET LATCH & BOLT
INSTALLATION INSTRUCTIONS

INSTALLATION INSTRUCTIONS

- Fold the template where indicated.
- Position the template on the door edge at the required latch height.
- Measure the door thickness and mark the centre point for the latch/bolt.
- Drill a 25mm hole with a spade or auger drill bit to a depth of 75mm
  Mark the drill bit to show the required depth with masking tape - See **FIG 1**
- Ensure the hole is drilled horizontally.
- Remove any sawdust from the hole.
- Drill another 20mm hole for the spindle on the face of the door – **A**
- Drill 5mm holes (**B** & **C**) which are to be used in conjunction with Hunta bolt through fixings, supplied with our levers and accessories.
- Before tapping the latch into the door ensure latchbolt is in correct position for door operation - bevelled side of the latchbolt should face the direction of the door closure.
- Insert the latch / bolt in the door edge ensuring the latch / bolt is fitted vertically.
  Use a spindle through the follower to make sure the latch is aligned correctly.
- Use a 32mm spade bit to prepare the mortice in the door frame for the round keep.
  Or chisel flush with frame if using the square strike plate - use strike plate as a template and chisel the rectangular recess to accommodate the plastic box keep.

Note: Ensure all holes are drilled squarely for correct operation.


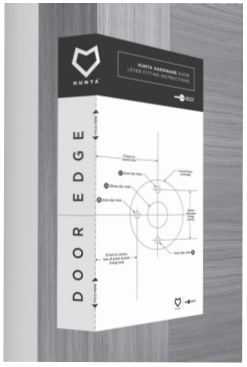


FIG 1



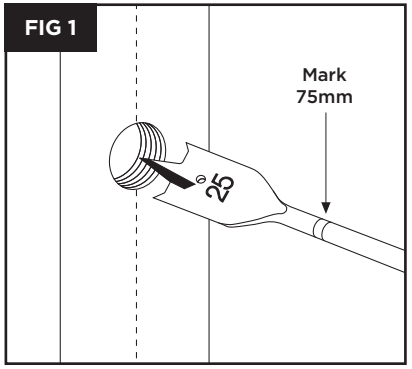


FOLD HERE

DOOR EDGE

FOLD HERE

PLEASE DOUBLE CHECK ALL MEASUREMENTS BEFORE DRILLING

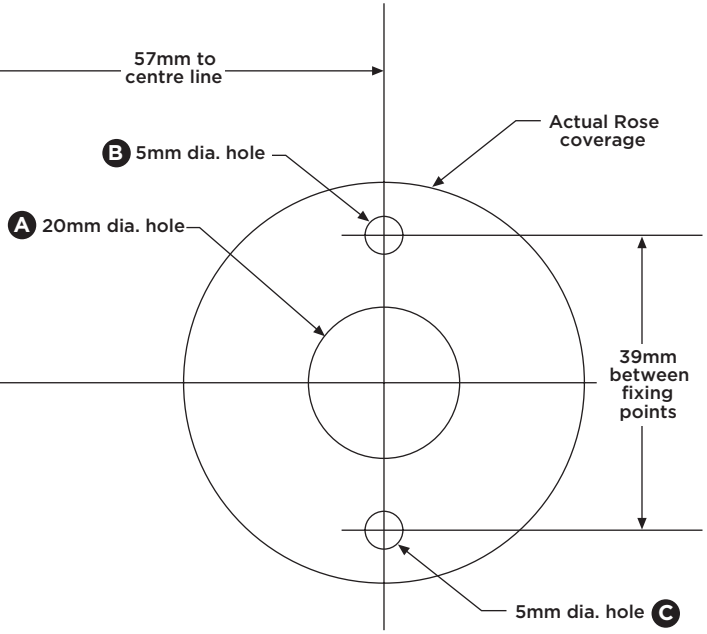

 Copyright © 2022 • Bullet Latch Instruction 1.3

HUNTA | PRESS FOR PRIVACY